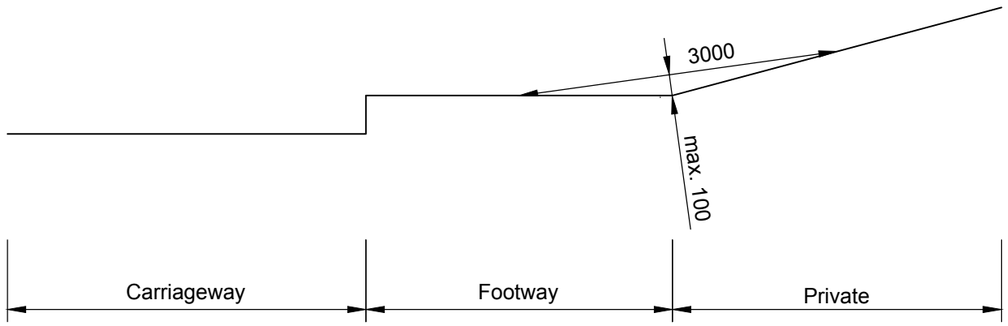

ROLLOVER
See Note 2

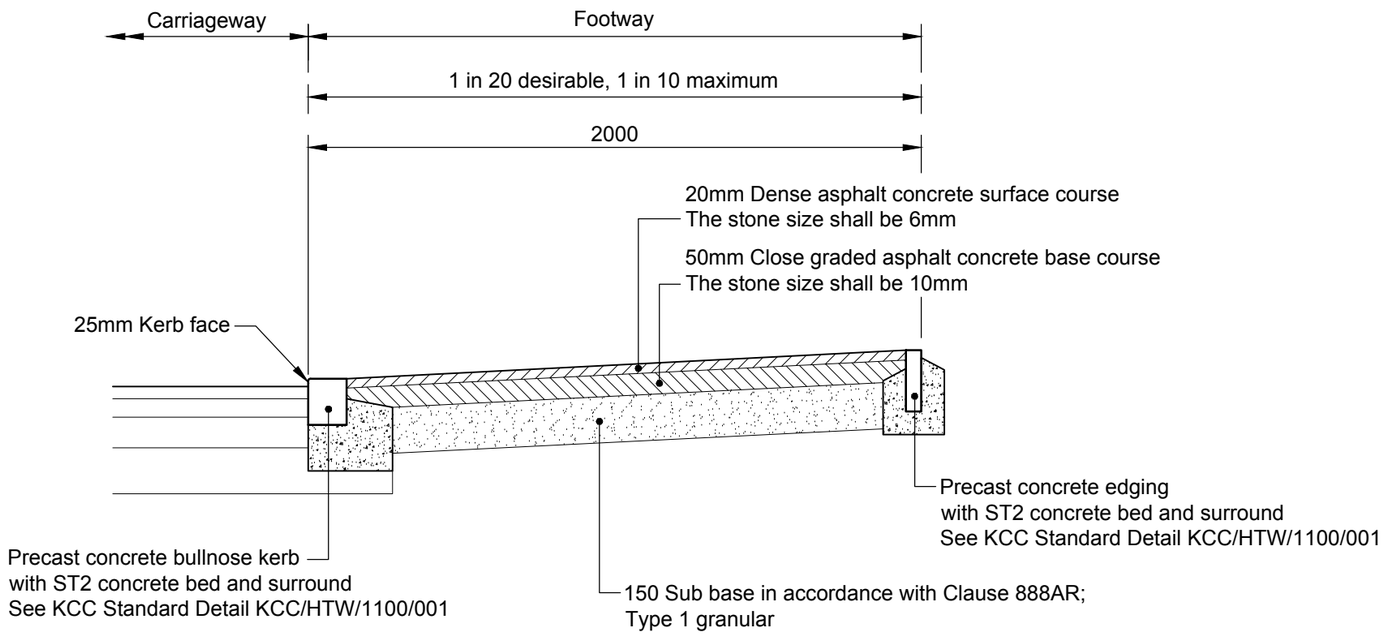
Carriageway
Footway
1 in 20 desirable, 1 in 10 maximum
2000
20mm Dense asphalt concrete surface course
The stone size shall be 6mm
50mm Close graded asphalt concrete base course
The stone size shall be 10mm
25mm Kerb face
Precast concrete edging
with ST2 concrete bed and surround
See KCC Standard Detail KCC/HTW/1100/001
Precast concrete bullnose kerb
with ST2 concrete bed and surround
See KCC Standard Detail KCC/HTW/1100/001
150 Sub base in accordance with Clause 888AR;
Type 1 granular

Notes

1. All dimensions are in millimetres.
2. The gradient of the private driveway should not normally exceed 1 in 10 or in extreme cases 1 in 8 and a "rollover" should be incorporatedat the start of the driveway to ensure that vehicles do not 'bottom' on the vehicle crossing on entry or exit.

Received - 16 January 2020
Planning Applications Group

Rev	Revision Date	Purpose of revision	Drawn	Check'd	App'd

Kent County Council
Sessions House
Maidstone
ME14 1XQ

Director of Highways, Transportation and Waste

Project: STANDARD DETAIL

Drawing title: Vehicle Crossing

This drawing is not to be used in whole or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.
DO NOT SCALE

Drawn: AMEY	Checked: CL	Approved: CL
Date: 25/08/17	Scale @A3: Not to Scale	

Drawing number: KCC/HTW/1100/019

Rev: 0

P:\D - Projects\CO04300653 - KentCC std details\102.Drawings\01. Working\1100 Kerbs, Footways and Paved Areas\KCC-HTW-1100-019.dwg

A3